


# BORE GAGES

Read the diameter directly, after inputting the size of setting ring.



MIN

The minimum value tracking function can find the diameter automatically.




(mm)

Range	A	B	C	ØD	ØE	F	L
35-60mm	22	9	27	13	12.8	SR2	141
50-100mm	26	9	35	13	12.8	SR2	141
50-160mm	26	9	35	13	12.8	SR2	141
100-160mm	26	9	35	13	12.8	SR2	141
160-250mm	56.5	13	74.5	15	12.8	SR2	241
250-450mm	86.5	15	101.5	15	14.5	SR2.5	241

Code	Range	Indicator	Accuracy	Repeatability
<b>2322-35A</b>	18-35mm	dial indicator, range 10mm, graduation 0.01mm (code <b>2308-10FA</b> )	±0.015mm	0.003mm
<b>2322-60A</b>	35-60mm		±0.018mm	0.003mm
<b>2322-100A</b>	50-100mm		±0.018mm	0.003mm
<b>2322-160A</b>	50-160mm		±0.018mm	0.003mm
<b>2322-161A</b>	100-160mm		±0.018mm	0.003mm
<b>2322-250A</b>	160-250mm		±0.018mm	0.003mm
<b>2322-450A</b>	250-450mm	±0.018mm	0.003mm	

Code	Range	Indicator	Accuracy	Repeatability
<b>2122-35A</b>	18-35mm	digital indicator, range 12.7mm/0.5", resolution 0.002mm/0.0001" (code <b>2108-10F</b> )	±0.015mm	0.003mm
<b>2122-60A</b>	35-60mm		±0.018mm	0.003mm
<b>2122-100A</b>	50-100mm		±0.018mm	0.003mm
<b>2122-160A</b>	50-160mm		±0.018mm	0.003mm
<b>2122-161A</b>	100-160mm		±0.018mm	0.003mm
<b>2122-250A</b>	160-250mm		±0.018mm	0.003mm
<b>2122-450A</b>	250-450mm	±0.018mm	0.003mm	

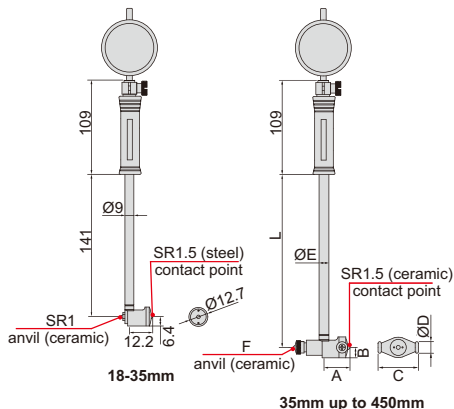

Unit: mm

ATTENTION: NOT SUITABLE  
FOR 0.001MM DIAL INDICATORS



DATA  
OUTPUT



VIDEO

ceramic  
contact point



2322-160A

ceramic  
anvil



ceramic  
anvil



2122-35A

- Optional accessory:  
setting ring (code **6312**),  
long handle (code **7351**)

